

# V40xED ELECTRIC DOGGING

Electric Dogging is designed for entrance and exit doors with panic or fire exit hardware. When energized, and after a push pad is depressed, the push pad and the latch bolt remain retracted, providing push-pull operation. Relocking all devices is accomplished by using a single switch or through a fire alarm input.



Model No. V40xEDx628



Model No. V40xEDx711

## Packaging

The ED standard package includes:

- V40 Series exit device (Grade 1 panic device)
- ED electronics
- 628 Anodized Aluminum base plate

## Options and Accessories


- 80-800, 10-800, 11-800 Controller and Power Supply or 24VAC Transformer (PP-5152-2) required
- F prefix - 3 Hour Fire rating (ex. FV40xED)
- 711 - Black Anodized Extruded Housing
- Outside Trim (see outside trims for Value Series)
- EX- Exit Switch (ex. V40xEDxEX)
- AL18 - Surface Armored Loop (Door/Frame Mounted)
- FC - Flex Conduit kit 3' mounts to end cap device

## Technical Specifications

- Requires 24V AC/DC (Detex Power Supply sold separately)
- Continuous Duty Magnet - quiet operation
- Maintained latch and push pad retraction

- Optional EX Exit Switch - Push Pad Monitor Switch
- UL Listed panic and fire exit hardware

## System Elevation

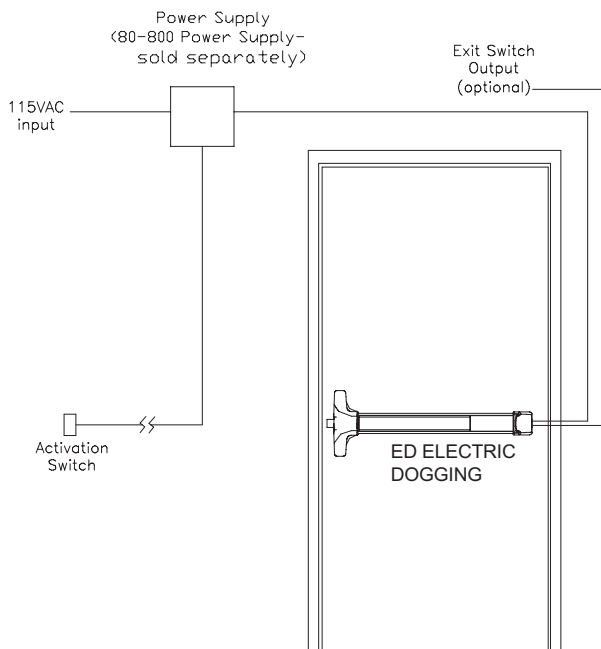

## Terminal Strip

